



Applications

- Prevention of precipitation of various solids (lime, sand, cement)
- For prevention of low current sedimentation and for stirring of anaerobic steams
- Prevent sedimentation of sediment in sewage and excretory treatment plants




Material

- Casing SS304
- Shaft SS420
- Propeller SS304
- Wear ring SS304
- Lifting chain SS304

Feature

- Simple salvage structure for easy lifting and installation
- Multi-pole motor enables mass processing without decelerator
- Perfect waterproof with double mechanical seal

Performance Curve Plot

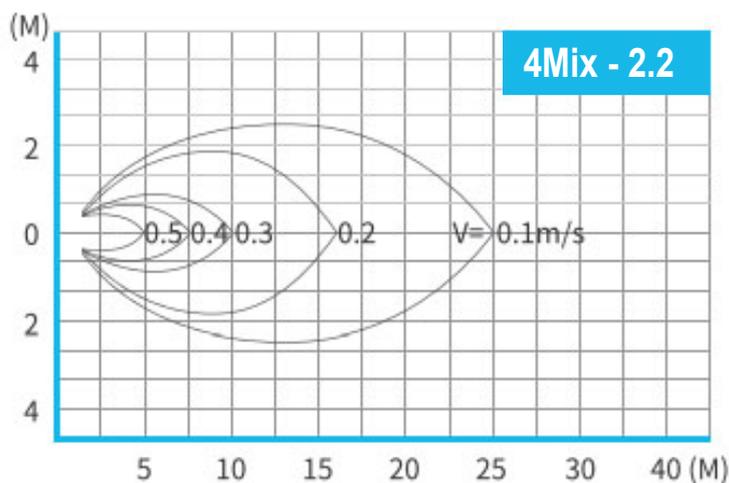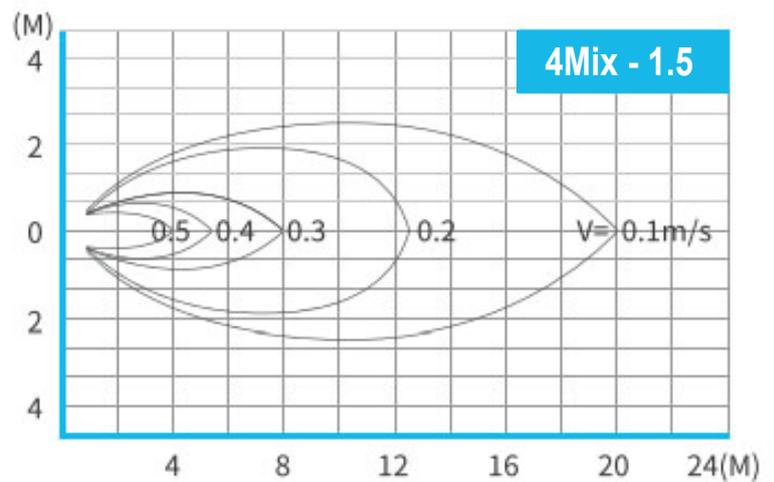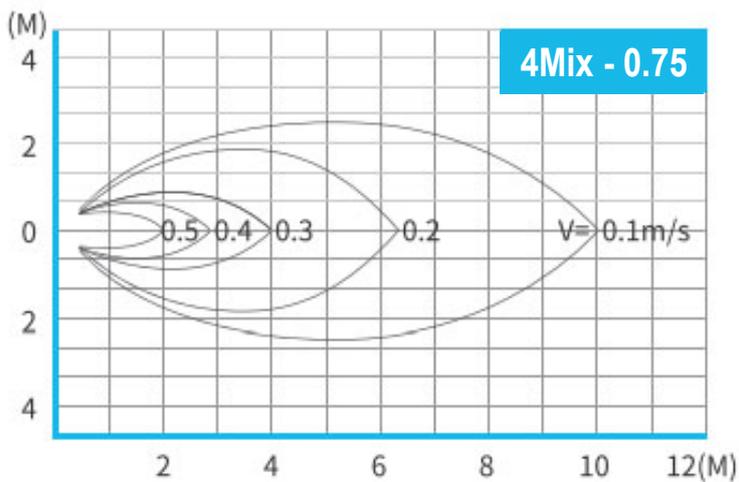

Technical Table

Model	Power	Pole	Output (kW)	Max.speed (m/s)	Max.tank volume (m ³)	Max.mixing range (m)
4Mix-0.75	three phase 380V	4P	0.75	0.5	50	6
4Mix-1.5			1.5		100	12
4Mix-2.2			2.2		150	15

